




CAD LOCATION:

IF IN DOUBT ASK. DO NOT SCALE



USED ON:

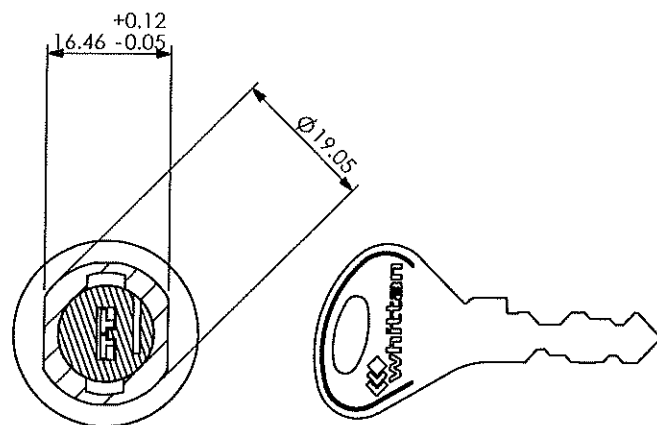


SECTION A-A

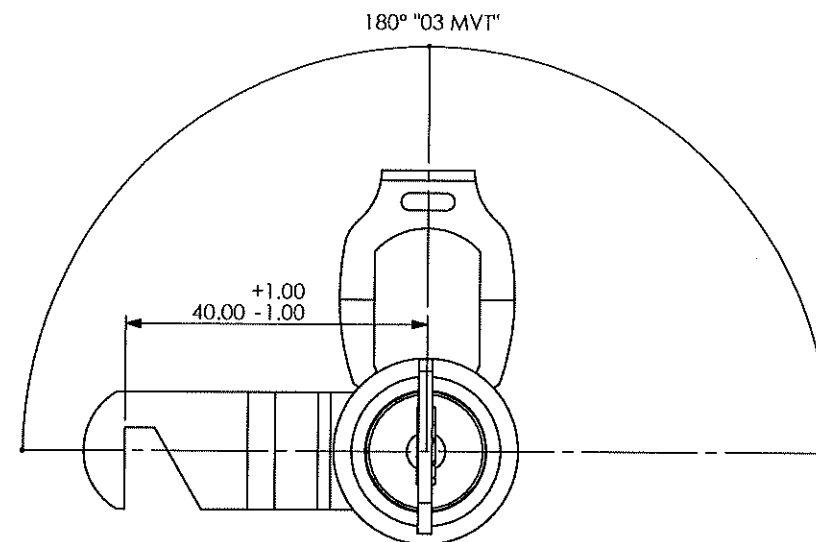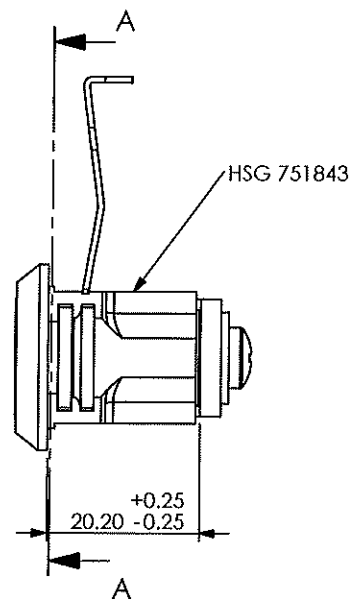

CAM SHOWN AT 9 O'CLOCK LOCKED POSITION
CAM SUPPLIED FITTED CRANK TOWARDS
CAM @ 3 O'CLOCK OPEN
180° CLOCKWISE MOVEMENT
KEY FREE @ 12 & 6 O'CLOCK
TWO KEYS PER LOCK TO DIFFER
L&F REF1476517B
HORSE SHOE CLIP SUPPLIED LOOSE

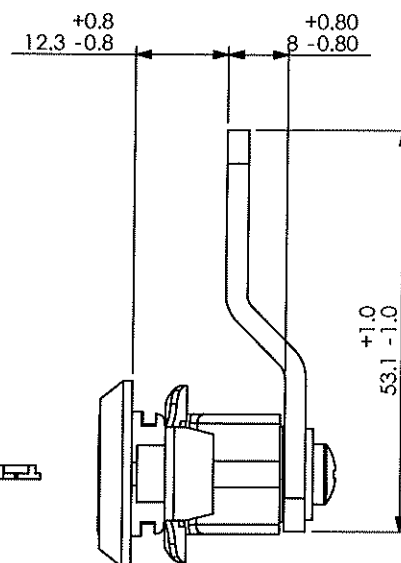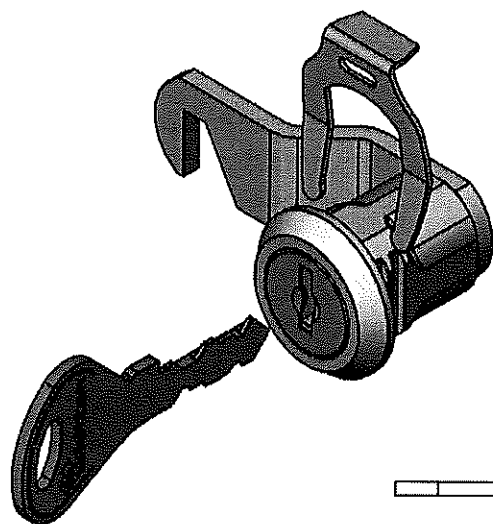

DIMENSIONS ARE IN MM PRIOR TO FINISHING UNLESS OTHERWISE SPECIFIED X.=±0.5MM .X=±0.25MM .XX=±0.1MM .XXX=±0.05MM X°=±1°						
MATERIAL		SEE COMPONENTS		2	ECN7270 HSG UPDATED	01/05/20
SPEC.		SEE COMPONENTS		1	PRODUCTION RELEASE ECN 7212	24/01/19
FINISH		HSG STB207 NICKEL		B	UPDATED TO CUSTOMER SPEC	02/08/18
DRAWN		P GRIFFITHS	DATE 26/04/18	A	PROVISIONAL	26/04/18
CHECKED		CST	DATE 11/5/20	NO	MODIFICATION	DATE
© COPYRIGHT 2017 NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY WAY WITH OUT PRIOR PERMISSION						ORIGINAL SHEET SIZE A4
				DESCRIPTION		
 LOWE & FLETCHER LOCKING SYSTEMS FOR INDUSTRY				CAMLOCK WHITTAN REF C107		
				1476723 (SHT 1 OF 1)		